

CBF

客製化濾袋 Customized Bag Filter


特長 Features

- 根據不同液體特性及耐藥性，可提供最適材質對應及生產。
 - 材料生產經原廠認證不含有毒物質及矽油，使用上安全無虞。
 - 為滿足客戶的具體需求，可依不同使用條件及環境客製化。
- According to the characteristics of different liquid and chemical resistance of materials, we provide the most suitable type for you.
 - It is safety by authentication of manufacturer that our product doesn't contain any toxic substance or silicon oil.
 - In order to satisfy every customer, we can customize filter bags based on using conditions and environments.


適用領域 Application

- ◆光電：膠類塗佈、溶劑過濾
 - ◆食品工業：食品飲料加工過濾
 - ◆化學工業：各種塗料、化學藥品處理
 - ◆廠務系統：超純水前置過濾
- ◆Coating of gel liquids、Solvent filtration
 - ◆Food & beverage filtration
 - ◆Paint、Filtration of chemical liquid
 - ◆Pre-filter of pure water


型式 Model No.

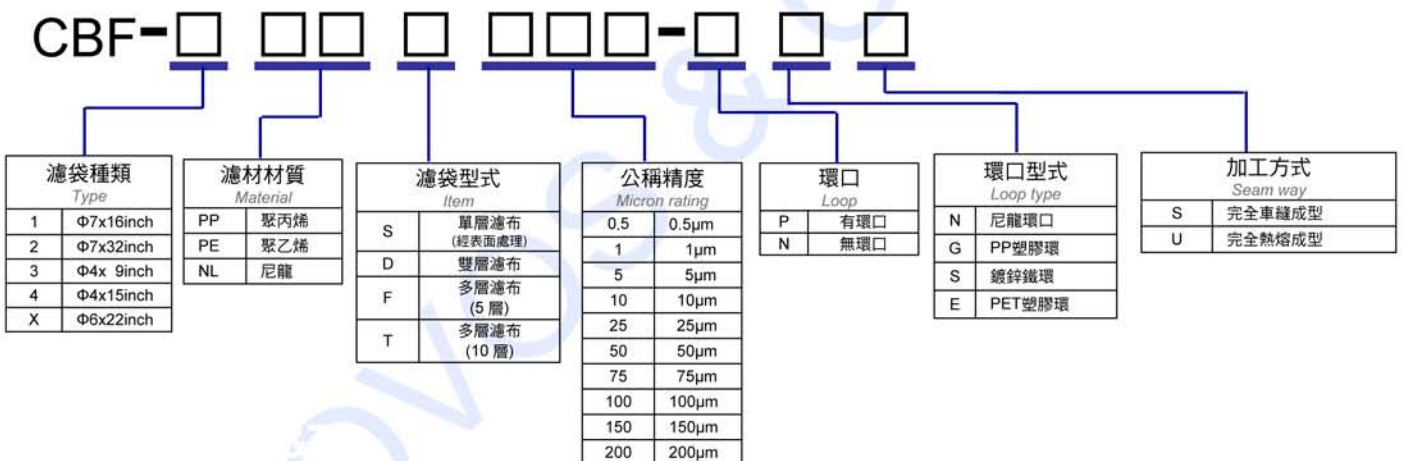

1~4號袋規格

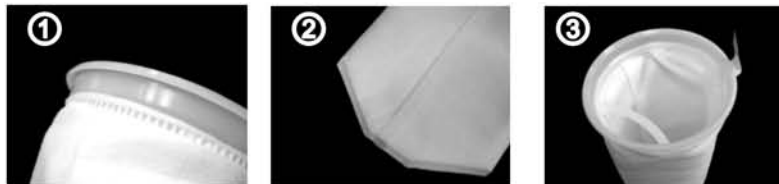

X號袋規格

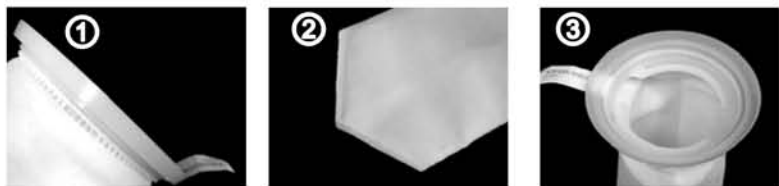

耐藥品性 Chemical resistance

最高使用溫度·耐藥品性

● 適合/Excellent


○ 可/Suitable

× 不適合/Not suitable

材質 Material	最高耐熱溫度 Max. Temperature	弱酸 Acid	強酸 Strong Acid	弱鹼 Alkali	強鹼 Strong Alkali	溶劑 Solvent
PP (Polypropylene/聚丙烯)	90°C	●	●	●	●	○
PE (Polyethylene/聚乙烯)	135°C	○	○	○	×	○
NL (Nylon/尼龍)	115°C	○	×	●	●	○

濾袋尺寸表 & 參考流量 Size & flow rate

規格 Specification	1 號袋	2 號袋	3 號袋	4 號袋	X 袋(6 號)
直徑×長度(吋) Diameter×Length(inch)	7×16	7×32	4×9	4×15	6×22
表面積 (m ²) Surface(m ²)	0.1859	0.4089	0.0465	0.0929	0.1859
參考流量 (L/min.) Flow rate(L/min.)	0~340	0~750	0~75	0~170	0~340

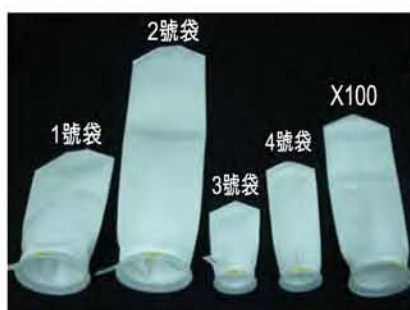

BFH type 濾袋機
(多用途高壓式袋濾機)



BFU type 濾袋機
(上注式減壓型袋濾機)



●本公司保留不預告情況下修改或變更以上刊載內容之權利。
●Specifications mentioned in the book may be changed without previous announcement.

CH180426
繁體中文版

經銷商



誠風企業股份有限公司
DEOVOS & Co Ltd
23159 新北市新店區安興路125-6號14樓
14F., No. 125-6, Anxing Rd., Xindian Dist., New Taipei City 23159, Taiwan
T.+886-2-2211-8811 F.+886-2-2211-8831
www.deovos.com.tw

